



Installation instruction

OPTION - Interior unlocking



Link to
Technical sheet
OPTION - Interior unlocking

scan me



Retrouvez toutes nos solutions
RIDEAU ALUMINIUM
DES VEHICULES SPECIAUX
sur www.mcd-fr.com

Option Interior unlocking for Double handle






1 -> Interior unlocking
bracket

2 -> Interior unlocking
pedal

3 -> Stainless interior
unlockign deck plate



4 -> Screw poelier 6X30

5 -> Rivets 4X8

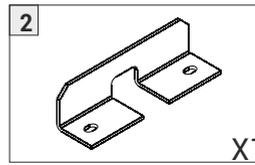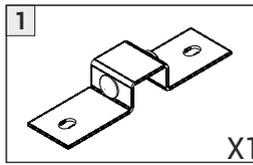


Installation Interior unlocking for Double handle

- 1 Place the strap through the omega, between the axle and the walling from the bottom to the top. Install the unlocking pedal behind the omega, press the whole assembly on the cover and fix it using 6x30 poelier screws.



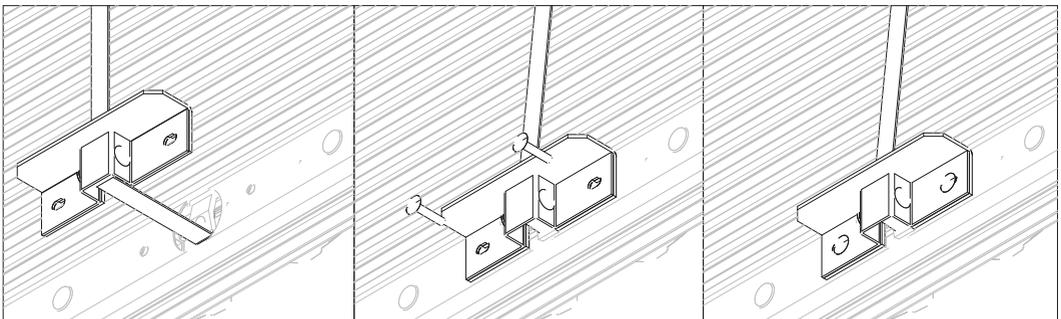
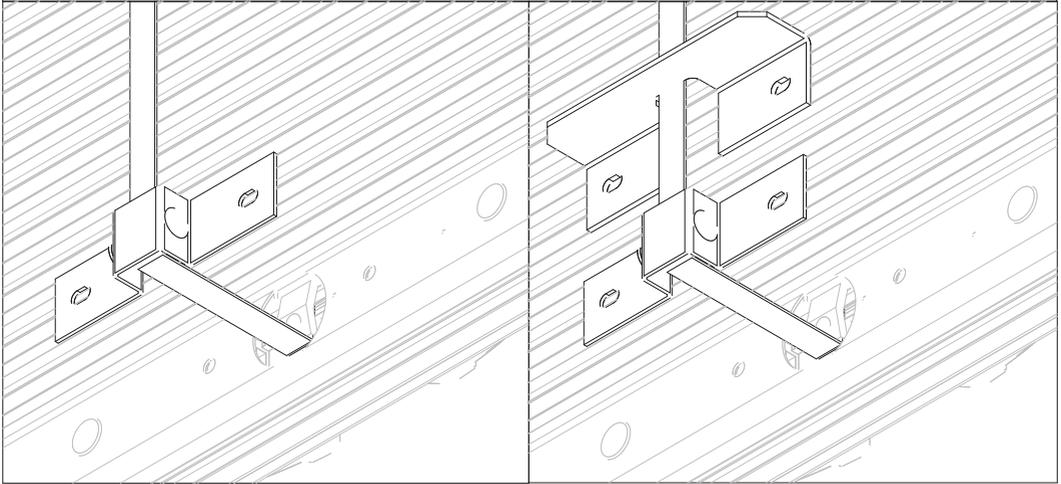


2 Stretch the strap vertically and place the deck below the seam. Drill diameter 4.2 and put the rivets (be careful to don't damage the front face of the shutter!)

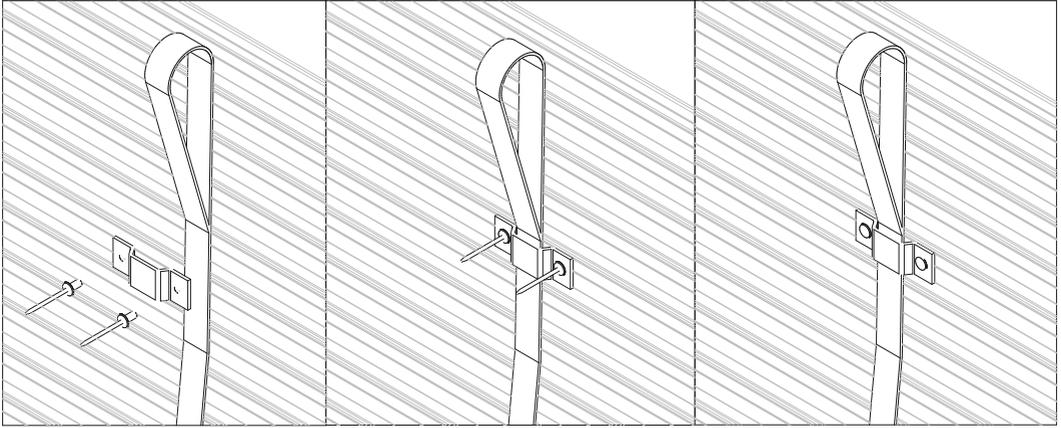


Option Interior unlocking for Bar lift handle

- 1 -> Unlocking system
- 2 -> Rivets 4.8X10
- 3 -> Rivets 4X8
- 4 -> Stainless interior unlockn deck plate

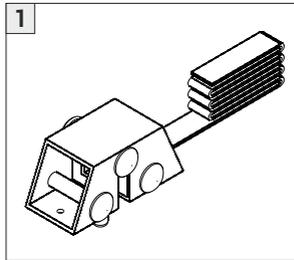

Installation Interior unlocking for Bar lift handle

1 Place the unlocking system at the rear of the bottom profile, in front of dedicated drillings. Put the 4.8x10 rivets.

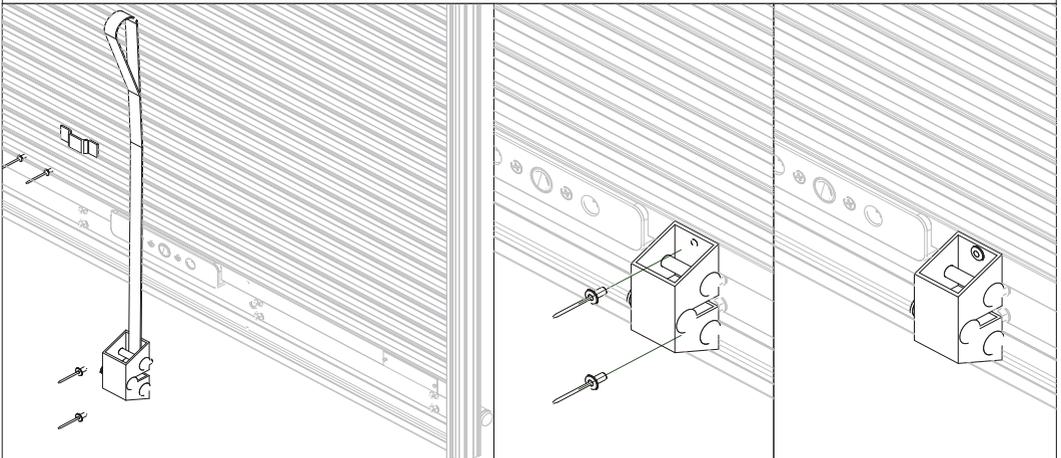

2 Stretch the strap vertically and place the deck below the seam. Drill diameter 4.2 and put the rivets (be careful to don't damage the front face of the shutter!)

